
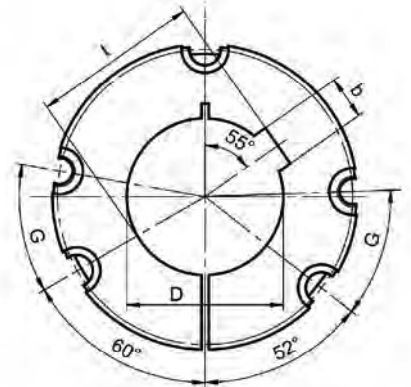


**FEINORD**

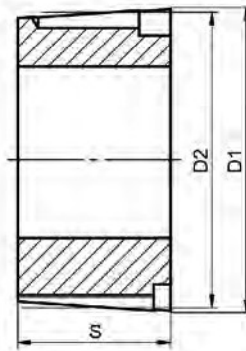

**4535**

Cast iron:GG25

Screw Specification:3/4-10BSW×2

Transmissible torque: 12400Nm

Bore In Metric

Tools for tighten: Allen wrench 9/16"

Screws Quantity: 3

Screw tightening torque:192Nm

Product Code	Product Model	D1	D2	S	D (G7)	b	Js9	t	Weight (Kg)	
CP048017	4535-28MM	161.72	155.7	89	28	8	±0.018	D+3.3	11.06	
CP048019	4535-40MM				40	12	±0.021	D+3.3	10.78	
CP015142	4535-48MM				48	14		D+3.8	10.26	
CP015149	4535-50MM				50			D+3.8	10.05	
CP015153	4535-55MM				55	16		D+4.3	9.94	
CP015158	4535-60MM				60	18		D+4.4	9.62	
CP015163	4535-65MM				65			D+4.4	9.38	
CP048022	4535-70MM				70	±0.026	20	D+4.9	9.04	
CP015171	4535-75MM				75			D+4.9	8.64	
CP015176	4535-80MM				80			22	D+5.4	8.64
CP015181	4535-85MM				85				D+5.4	7.46
CP015185	4535-90MM				90			25	D+5.4	7.46
CP015191	4535-95MM				95				D+5.4	6.95
CP015018	4535-100MM				100	±0.031	28	D+6.4	6.48	
CP015023	4535-105MM				105			D+6.4	6.48	
CP015030	4535-110MM				110			D+6.4	5.8	
CP015038	4535-115MM				115			32	D+7.4	4.81
CP048013	4535-120MM				120	D+7.4	4.24			
CP048014	4535-125MM				125	D+7.4	3.67			