
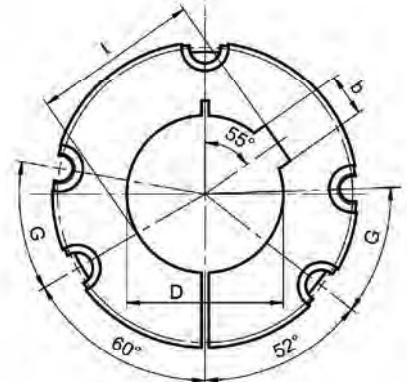


FEINORD



5050

Cast iron:GG25

Screw Specification:7/8-9BSW×2-1/4

Transmissible torque: 14200Nm

Bore In Metric

Tools for tighten: Allen wrench 3/4"

Screws Quantity: 3

Screw tightening torque:271Nm

Product Code	Product Model	D1	D2	S	D (G7)	b	Js9	t	Weight (Kg)	
CP051767	5050-30MM	177.6	170.69	127	30	8	±0.018	D+3.3	18.74	
CP079839	5050-40MM				40	12		±0.021	D+3.3	18.24
CP016722	5050-48MM				48	14			D+3.8	17.65
CP016732	5050-50MM				50			D+3.8	17.46	
CP016737	5050-55MM				55	16		D+4.3	17.2	
CP016752	5050-60MM				60			D+4.4	17.58	
CP016758	5050-65MM				65	18		D+4.4	16.2	
CP016765	5050-70MM				70		20	D+4.9	15.86	
CP016770	5050-75MM				75	D+4.9		15.33		
CP016777	5050-80MM				80	22	D+5.4	14.72		
CP016784	5050-85MM				85		D+5.4	14.18		
CP016786	5050-88MM				88	25	D+5.4	13.78		
CP016791	5050-90MM				90		D+5.4	13.54		
CP016798	5050-95MM				95	±0.026	D+5.4	12.92		
CP016800	5050-98MM				98		D+6.4	12.54		
CP047963	5050-100MM				100	28	D+6.4	12.15		
CP016552	5050-102MM				102		D+6.4	11.86		
CP016558	5050-105MM				105	32	D+6.4	11.42		
CP081140	5050-109MM				109		D+6.4	10.82		
CP016568	5050-110MM				110	±0.031	D+6.4	10.66		
CP016575	5050-115MM				115		D+7.4	9.81		
CP016584	5050-120MM				120	32	D+7.4	8.98		
CP016591	5050-125MM				125		D+7.4	8.95		
CP016595	5050-127MM				127	±0.031	D+7.4	7.75		
CP016600	5050-130MM				130		D+7.4	7.21		