


**SERIES U501.03/601.03 I SIZE 10 - 55**

Rohrausführung ohne Längenausgleich  
 Tube design, without length compensation

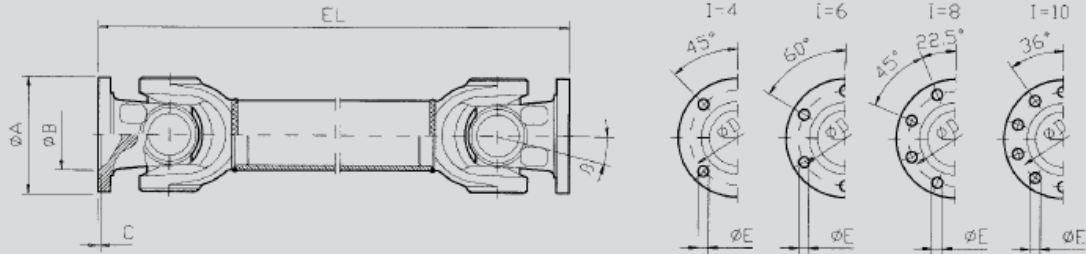

501.03 601.03	A	B <sup>H7</sup>	C +0,2	D ± 0,1	E <sup>B12</sup>	I <sup>1)</sup>	EL <sup>2)</sup>	Md	B
	[mm]	[mm]	[mm]	[mm]	[mm]		[mm]	[Nm]	[°]
501.10.03	58	30	1,5	4,7	5	4	160	150	30
501.20.03	65	35	1,7	5,2	6	4	165	250	30
501.30.03	75	4,2	2,0	6,2	6	6	200	500	30
601.00.03	90	4,7	2,5	7,5	8	4	220	800	20
601.05.03	100	5,7	2,5	8,4	8	6	250	1.350	20
601.10.03	120	7,5	2,5	10,5	10	8	320	3.000	20
601.15.03	120	7,5	2,5	10,5	10	8	370	4.000	35
601.20.03	150	9,0	3,0	13,0	12	8	390	6.000	35
601.30.03	150	9,0	3,0	13,0	12	8	435	6.500	35
601.35.03	180	11,0	3,0	15,5	14	8	475	10.000	35
601.42.03	180	11,0	3,0	15,5	16	10	480	16.500	25
601.48.03	180	11,0	3,0	15,5	16	10	500	26.500	30
601.50.03	225	14,0	4,4	19,6	16	8	540	33.000	24
601.55.03	250	14,0	5,5	21,8	18	8	610	40.000	20

1) Anzahl der Bohrungen  
 2) Einbaulänge

1) Number of holes  
 2) Operating length