


**SERIES U601.04 I SIZE 00 - 55**

Zwischenwelle ohne Längenausgleich  
Intermediate shaft without length compensation

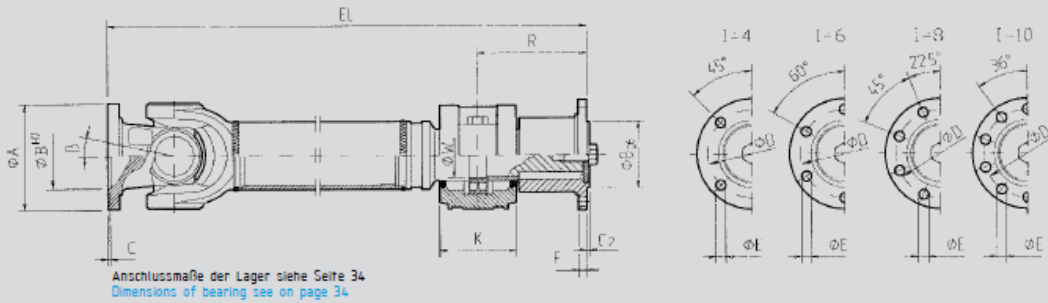

Anschlussmaße der Lager siehe Seite 34  
Dimensions of bearing see on page 34

601.04	A	B <sup>H7/g6</sup>	C	C <sub>2</sub>	D	E <sup>H12</sup>	F	I <sup>1)</sup>	K	R	W	EL <sup>2)</sup>	Md	β
	[mm]	[mm]	+0,2 [mm]	-0,2 [mm]	± 0,1 [mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[Nm]	[°]
601.00.04	90	4,7	2,5	2,3	74,5	8	6	4	80	68,5	35	270	800	30
601.05.04	100	5,7	2,5	2,3	84	8	7	6	80	68,5	35	280	1.350	30
601.10.04	120	7,5	2,5	2,3	101,5	10	8	8	87	71,5	45	310	3.000	35
601.15.04	120	7,5	2,5	2,3	101,5	10	10	8	87	71,5	45	330	4.000	35
601.20.04	150	9,0	3,0	2,8	130	12	10	8	105	87,5	55	365	6.000	35
601.30.04	150	9,0	3,0	2,8	130	12	12	8	110	105,5	60	410	6.500	35
601.35.04	180	11,0	3,0	2,8	155,5	14	14	8	115	110,5	65	430	10.000	24
601.42.04	180	11,0	3,0	2,8	155,5	16	14	10	120	115,5	75	455	16.500	25
601.48.04	180	11,0	3,0	2,8	155,5	16	14	10	135	130,5	80	465	26.500	30
601.50.04	225	14,0	4	4,5	196	16	15	8	160	235	100	770	33.000	24
601.55.04	250	14,0	5	5,5	218	18	18	8	180	265	120	790	40.000	20

1) Anzahl der Bohrungen  
2) Einbaulänge

1) Number of holes  
2) Operating length