


**SERIES U601.93/601.93.U I SIZE 10 - 55**

Kurz Ausführung, großer Längenausgleich, wartungsarm  
 Short design, large length compensation, low maintenance

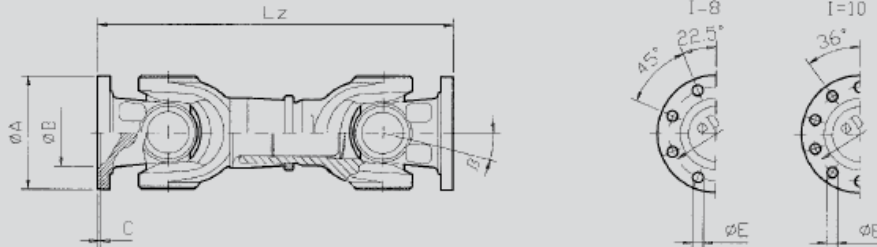


601.93	A	B <sup>1)</sup>	C	D	E <sup>2)</sup>	I <sup>1)</sup>	Lz <sup>2)</sup>	La	Md	β
	[mm]	[mm]	+0,2 [mm]	± 0,1 [mm]	[mm]		[mm]	[mm]	[Nm]	[°]
601.10.93	120	75	2,5	101,5	10	8	400	50	3.000	25
601.15.93	120	75	2,5	101,5	10	8	410	35	4.000	20
601.20.93	150	90	3,0	130	12	8	445	35	6.000	25
601.30.93	150	90	3,0	130	12	8	470	40	6.500	25
601.35.93	180	110	3,0	155,5	14	8	510	35	10.000	24
601.42.93	180	110	3,0	155,5	16	10	650	80	16.500	25
601.48.93	180	110	3,0	155,5	16	10	730	100	26.500	30
601.50.93	225	140	5,0	196	16	8	650	80	28.000	24
601.55.93	250	140	5,5	218	18	8	720	60	34.000	20

1) Anzahl der Bohrungen  
 2) Zusammengeschobene Länge

1) Number of holes  
 2) Compressed length

Kurz Ausführung, großer Längenausgleich, Übergangsflansch, wartungsarm  
 Short design, large length compensation, large flange diameter, low maintenance

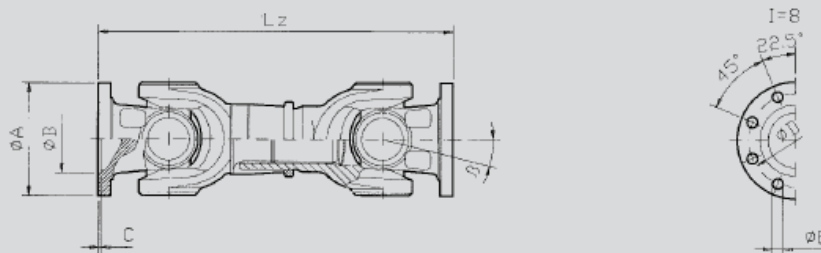

601.93.U	A	B <sup>1)</sup>	C	D	E <sup>2)</sup>	I <sup>1)</sup>	Lz <sup>2)</sup>	La	Md	β
	[mm]	[mm]	+0,2 [mm]	± 0,1 [mm]	[mm]		[mm]	[mm]	[Nm]	[°]
601.10.93.U	150	90	3,0	130	12	8	400	50	3.300	25
601.15.93.U	150	90	3,0	130	12	8	410	35	5.000	20
601.20.93.U	180	110	3,0	155,5	14	8	445	35	6.500	25
601.30.93.U	180	110	3,0	155,5	14	8	470	40	10.000	25
601.35.93.U	225	140	5,0	196	16	8	480	35	12.000	24
601.42.93.U	225	140	5,0	196	16	8	650	80	16.500	25
601.48.93.U	225	140	5,0	196	16	8	730	100	26.500	30
601.50.93.U	250	140	6,0	218	16	8	650	80	28.000	24
601.55.93.U	285	175	6,0	245	20	8	720	60	34.000	20

1) Anzahl der Bohrungen  
 2) Zusammengeschobene Länge

1) Number of holes  
 2) Compressed length