
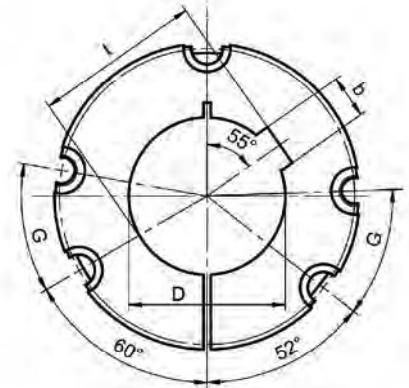


**FEINORD**

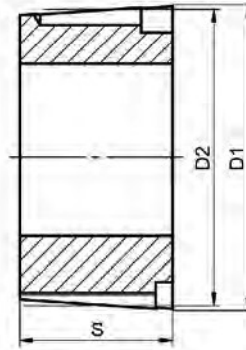

## 4545

Cast iron:GG25

Screw Specification:3/4-10BSW×2

Transmissible torque: 12400Nm

Bore In Metric

Tools for tighten: Allen wrench 9/16"

Screws Quantity: 3

Screw tightening torque:192Nm

Product Code	Product Model	D1	D2	S	D (G7)	b	Js9	t	Weight (Kg)			
CP015322	4545-35MM	161.72	155.7	114.3	35	10	±0.018	D+3.3	13.86			
CP058796	4545-38MM				38			D+3.3	13.76			
CP015341	4545-40MM				40	12	±0.021	D+3.3	13.62			
CP015364	4545-42MM				42			D+3.3	13.39			
CP048040	4545-45MM				45	14	±0.021	D+3.8	13.2			
CP015383	4545-48MM				48			D+3.8	12.9			
CP015394	4545-50MM				50	16	±0.021	D+3.8	12.88			
CP015401	4545-55MM				55			D+4.3	12.5			
CP015410	4545-60MM				60	18	±0.021	D+4.4	12.16			
CP048041	4545-65MM				65			D+4.4	11.74			
CP015424	4545-70MM				161.72	155.7	114.3	70	20	±0.026	D+4.9	11.3
CP048042	4545-75MM							75			D+4.9	10.88
CP015439	4545-80MM							80	22	±0.026	D+5.4	10.45
CP015447	4545-85MM							85			D+5.4	9.92
CP015451	4545-88MM							88	25	±0.026	D+5.4	9.56
CP015457	4545-90MM							90			D+5.4	9.31
CP015465	4545-95MM							95	28	±0.026	D+5.4	8.76
CP048027	4545-100MM							100			D+6.4	8.2
CP015205	4545-105MM							105	32	±0.031	D+6.4	7.44
CP015214	4545-110MM							110			D+6.4	6.72
CP015226	4545-115MM	115	32	±0.031				D+7.4	6.1			
CP015232	4545-120MM	120						D+7.4	5.23			