


**SERIES U801.04 I SIZE 22 - 43**

Zwischenwelle ohne Längenausgleich  
Intermediate shaft without length compensation

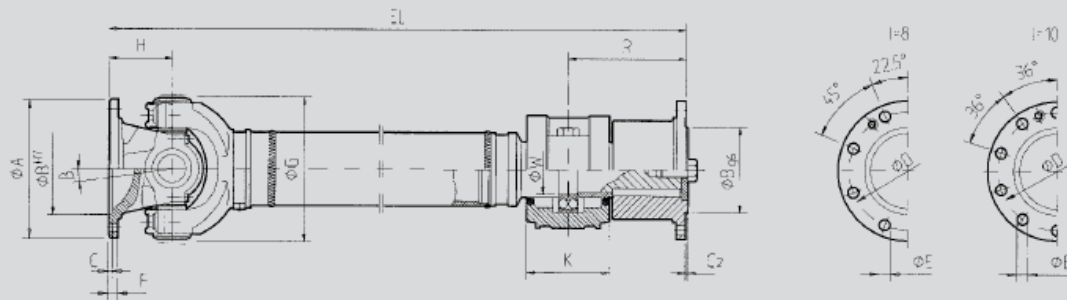

Anschlussmaße der Lager siehe Seite 34

Dimensions of bearing see on page 34

801.04 <sup>3)</sup>	A	B <sup>H7/g6</sup>	C +0,5 -0,2	C <sub>2</sub> -0,2	D ± 0,1	E	F	G	H	I <sup>1)</sup>	K	R	W	EL <sup>2)</sup>	M <sub>d</sub>	β
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[Nm]	[°]
801.22.04	225	14,0	5	4	196	16,1	15	215	108	8	160	235	100	770	33.000	24
801.25.04	250	14,0	6	5	218	18,1	18	250	125	8	180	265	120	790	40.000	20
801.28.04	285	175	7	5,5	245	20,1	20	285	135	8	180	265	120	810	44.000	15
801.31.04	315	175	7	5,5	280	22,1	22	315	150	8	190	300	130	830	64.000	15
801.35.04	350	220	8	7	310	22,1	25	350	170	10	220	335	150	920	83.000	15
801.39.04	390	250	8	7	345	24,1	28	390	190	10	235	355	160	1035	118.000	15
801.43.04	435	280	10	8,5	385	27,1	32	435	210	10	300	410	180	1080	156.000	15

1) Anzahl der Bohrungen

2) Einbaulänge

3) Auch lieferbar in Baureihe 021 und 061

1) Number of holes

2) Operating length

3) Also available for series 021 and 061